

B20L SERIES LFP BATTERY MODULES



Easy Installation & Safety Operation



Perfect Compatibility & Expandability




High Performance & Efficiency



Long-life Lithium Battery



Household



Telecom base station



Island cottage



Pasture




Farmhouse




Model	B20L48V100	B20L51V100
Nominal Voltage	48V	51.2V
Capacity	100Ah @0.2C, 25°C	
Energy	4.8kWh @0.2C, 25°C	5.12kWh @0.2C, 25°C
Dimensions (W*D*H)	442*400*130mm	
Weight	39.0±0.5kg	41.0±0.5kg
Charge Voltage	54.0V	57.6V
Standard Charge Current	20A @25°C	
Max. Continuous Charge Current	100Ah @25°C	
Standard Discharge Current	20A @25°C	
Max. Continuous Discharge Current	100Ah @25°C	
Discharge Cut-off Voltage	40.5V	43.2V
Operating Temperature	Charge: 0~+60°C Discharge: -20~+60°C	
Storage Duration	Charge: 0~+60°C Discharge: -20~+60°C	
Protection Class	IP20	
Cycle Life	≥6000 cycles @80%DOD	

Discharge Curve @0.2C, Different temp

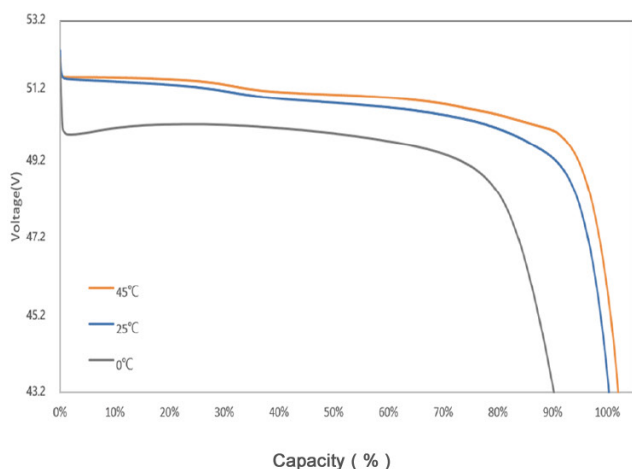

Cycle Times vs. DOD in HESS Scenario at 35°C

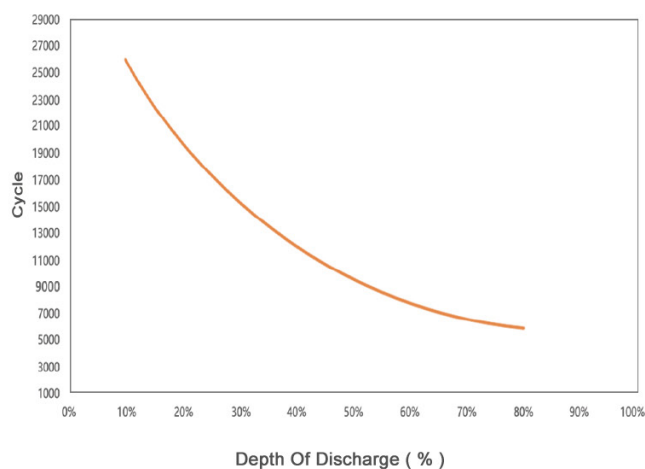

Zeus Appollo Solar

QLD office: 32 Crockford Street, Banyo, QLD4014
 WA office: Unit 5 / 30 Adams Drive, Welshpool, WA 6106
 Tel: +61 7 3123 6148 (QLD) +61 8 6311 9906 (WA)
 Email: sales@zeusappollosolar.com.au
 www.zeusappollo.com